


"45 YEARS BEHIND THE MOTO GUZZI"
using only selected materials

125

**MOTO
GUZZI**

SPORT

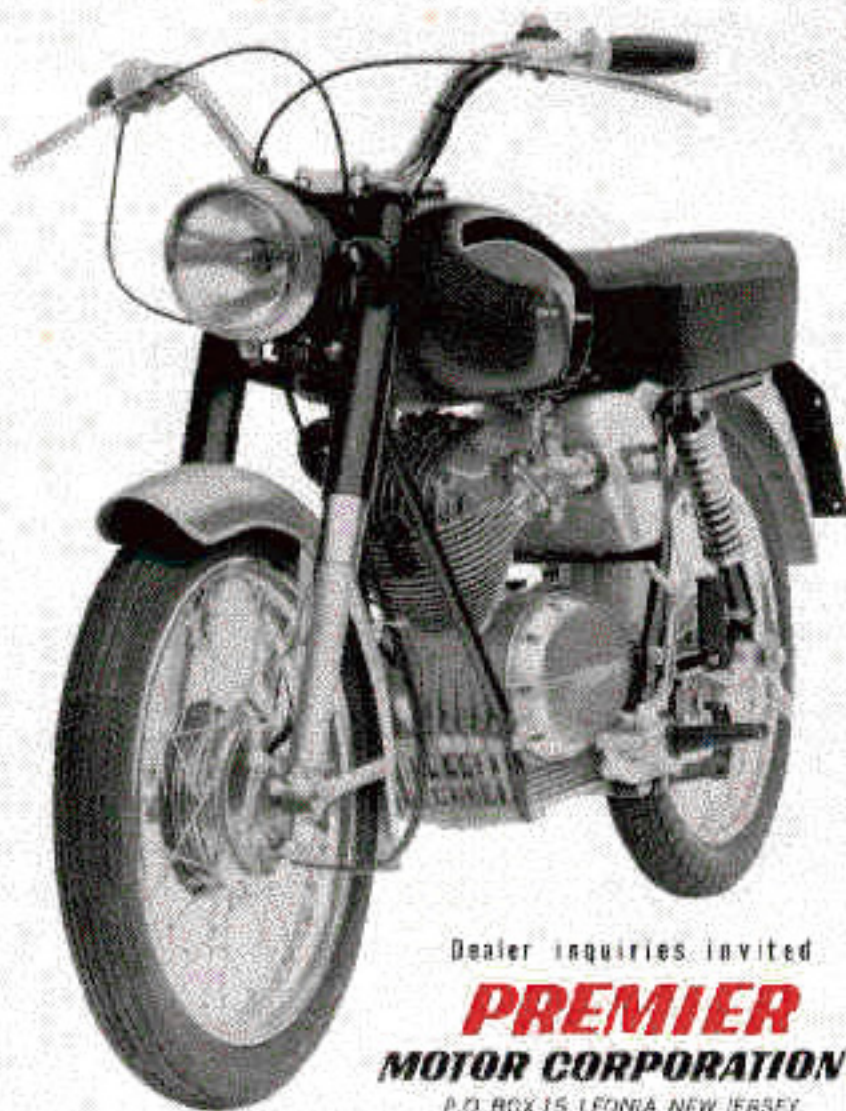

\$429. EAST & WEST

SPECIFICATION

ENGINE: single cylinder, four stroke.

CYLINDER: made of light alloy with special cast iron inserted liner, inclined 25°

CYLINDER HEAD: made of light alloy with valve gear in oil bath

VALVE OPERATION: push rods and rockers

BORE: 62 mm.

STROKE: 68 mm.

DISPLACEMENT: 125 cc.

OUTPUT: 12 HP

COMPRESSION RATIO: 9.5 to 1

LUBRICATION: oil sump in crankcase (about 1.3 litres - 0.632 gal. USA 0.417 imp. gal.)

OIL FILTERS: Screen type in crankcase - centrifugal on crankshaft

FUEL TANK CAPACITY: 15.5 litres (4.095 gal. USA - 3.409 imp. gal.) including 3 litres reserve (0.792 gal. USA - 0.66 imp. gal.)

FUEL CONSUMPTION: Litres 2.7 for 100 kms (89 m.p.g. USA - 104 m.p.g. imp.) (measured according to CUNA standards)

GEARBOX: 4 speeds, foot operated

IGNITION: flywheel alternator with external H.T. coil

SUSPENSION: telescopic front fork with hydraulic dampers, rear swinging fork with coil springs in the hydraulic dampers

BRAKES: expanding, front hand operated, rear foot operated

WHEELS: 17x2 1/4" rims

TYRES: front 2 1/2" x 17" ribbed, rear 2.75-17R" block tread

WEIGHT: about 92 kgs. (203 lbs.)

MAXIMUM SPEED: over 70 m.p.h.

Dealer inquiries invited

PREMIER
MOTOR CORPORATION

P.O. BOX 15, LEDNER, NEW JERSEY